
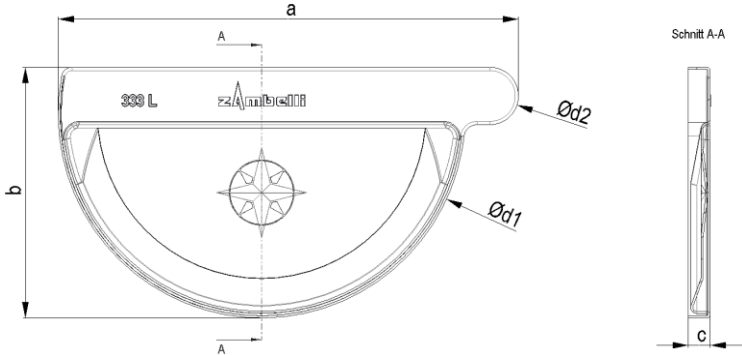


**Stop end for push-on installation and soldering (left)**

Image	Product Description	Technical Details																																								
	<ul style="list-style-type: none"> <li>■ for push-on installation add soldering</li> <li>■ half-round</li> <li>■ high-quality optical characteristic</li> <li>■ consistent shape and exact fit accuracy</li> </ul>	<p><b>Available dimensions:</b></p> <p>400, 333, 280, 250, 200</p> <p><b>Materials:</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 70%;">Copper</td> <td style="text-align: right;">0,55</td> </tr> <tr> <td>Zinc</td> <td style="text-align: right;">0,65</td> </tr> </table> <p><b>Measurements:</b></p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>size</th> <th>a</th> <th>b</th> <th>c</th> <th>Ød1</th> <th>Ød2</th> </tr> </thead> <tbody> <tr> <td>400</td> <td>214</td> <td>114</td> <td>6,8</td> <td>192</td> <td>22</td> </tr> <tr> <td>333</td> <td>173</td> <td>95</td> <td>7,3</td> <td>153</td> <td>20</td> </tr> <tr> <td>280</td> <td>145</td> <td>80</td> <td>7,0</td> <td>127</td> <td>18</td> </tr> <tr> <td>250</td> <td>123</td> <td>72</td> <td>7,0</td> <td>105</td> <td>18</td> </tr> <tr> <td>200</td> <td>96</td> <td>60</td> <td>8,0</td> <td>80</td> <td>16</td> </tr> </tbody> </table>	Copper	0,55	Zinc	0,65	size	a	b	c	Ød1	Ød2	400	214	114	6,8	192	22	333	173	95	7,3	153	20	280	145	80	7,0	127	18	250	123	72	7,0	105	18	200	96	60	8,0	80	16
Copper	0,55																																									
Zinc	0,65																																									
size	a	b	c	Ød1	Ød2																																					
400	214	114	6,8	192	22																																					
333	173	95	7,3	153	20																																					
280	145	80	7,0	127	18																																					
250	123	72	7,0	105	18																																					
200	96	60	8,0	80	16																																					
2D-Design		Material Standards																																								
		<table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="width: 50%;">Copper, Copper alloy</td> <td style="text-align: right;">DIN EN 1172</td> </tr> <tr> <td>Zinc, Zinc alloy</td> <td style="text-align: right;">DIN EN 988</td> </tr> </table>	Copper, Copper alloy	DIN EN 1172	Zinc, Zinc alloy	DIN EN 988																																				
Copper, Copper alloy	DIN EN 1172																																									
Zinc, Zinc alloy	DIN EN 988																																									

**Stop end for push-on installation and soldering (left)**

**Article numbers:**

size	Copper	Zinc
400	116250	136250
333	116255	136255
280	116260	136260
250	116265	136265
200	116270	136270

**Packaging information:**

size	Stk. /Karton
400	50
333	50
280	50
250	50
200	50

**Text of invitation for tender:**

Stop end for push-on installation and soldering, left, as an addition to the gutter, brand Zambelli or equivalent, delivery and installation.