
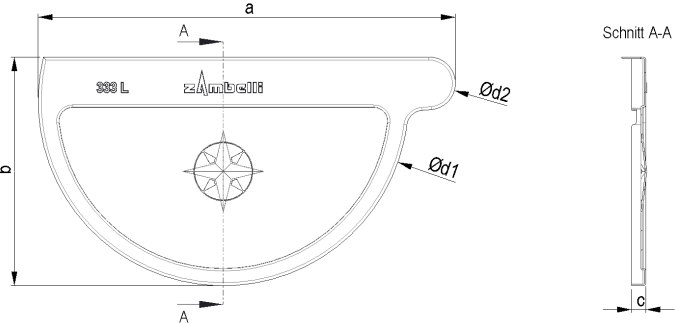


Stop end for soldering (left)

Image	Product description	Technical details																																														
	<ul style="list-style-type: none"> ■ for soldering ■ half-round ■ high-quality optical characteristic ■ consistent shape and exact fit accuracy ■ with compass card 	<p>Available dimensions:</p> <p>500, 400, 333, 280, 250, 200</p> <p>Materials:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Copper</td><td style="text-align: right;">0,55</td></tr> <tr><td>VM Blank-Zinc®</td><td style="text-align: right;">0,7</td></tr> <tr><td>VM Quartz-Zinc®</td><td style="text-align: right;">0,7</td></tr> <tr><td>VM Anthra-Zinc®</td><td style="text-align: right;">0,7</td></tr> </table>	Copper	0,55	VM Blank-Zinc®	0,7	VM Quartz-Zinc®	0,7	VM Anthra-Zinc®	0,7																																						
Copper	0,55																																															
VM Blank-Zinc®	0,7																																															
VM Quartz-Zinc®	0,7																																															
VM Anthra-Zinc®	0,7																																															
2D-Design	Material standards																																															
	<table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Copper, Copper alloy</td><td style="text-align: right;">DIN EN 1172</td></tr> <tr><td>Zinc, Zinc alloy</td><td style="text-align: right;">DIN EN 988</td></tr> </table>	Copper, Copper alloy	DIN EN 1172	Zinc, Zinc alloy	DIN EN 988	<p>Measurements:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>size</th> <th>a</th> <th>b</th> <th>c</th> <th>Ød1</th> <th>Ød2</th> </tr> </thead> <tbody> <tr><td>500</td><td>272</td><td>150</td><td>6,0</td><td>250</td><td>22</td></tr> <tr><td>400</td><td>214</td><td>114</td><td>5,0</td><td>192</td><td>22</td></tr> <tr><td>333</td><td>173</td><td>95</td><td>6,3</td><td>153</td><td>20</td></tr> <tr><td>280</td><td>145</td><td>80</td><td>5,5</td><td>127</td><td>18</td></tr> <tr><td>250</td><td>123</td><td>72</td><td>5,5</td><td>105</td><td>18</td></tr> <tr><td>200</td><td>96</td><td>60</td><td>5,5</td><td>80</td><td>16</td></tr> </tbody> </table>	size	a	b	c	Ød1	Ød2	500	272	150	6,0	250	22	400	214	114	5,0	192	22	333	173	95	6,3	153	20	280	145	80	5,5	127	18	250	123	72	5,5	105	18	200	96	60	5,5	80	16
Copper, Copper alloy	DIN EN 1172																																															
Zinc, Zinc alloy	DIN EN 988																																															
size	a	b	c	Ød1	Ød2																																											
500	272	150	6,0	250	22																																											
400	214	114	5,0	192	22																																											
333	173	95	6,3	153	20																																											
280	145	80	5,5	127	18																																											
250	123	72	5,5	105	18																																											
200	96	60	5,5	80	16																																											

Stop end for soldering (left)

Article numbers:

size	Copper	VM Blank-Zinc®	VM Quartz-Zinc®	VM Anthra-Zinc®
500	116200	136200		
400	116201	136201		
333	116205	136205	186205	236205
280	116210	136210		
250	116215	136215		
200	116220	136220		

Packaging information:

size	pc/box
500	25
400	25
333	25
280	25
250	25
200	50

Text for invitation to tender:

Stop End for soldering (left), as addition to gutter, Zambelli branded or equal, delivery and installation.