
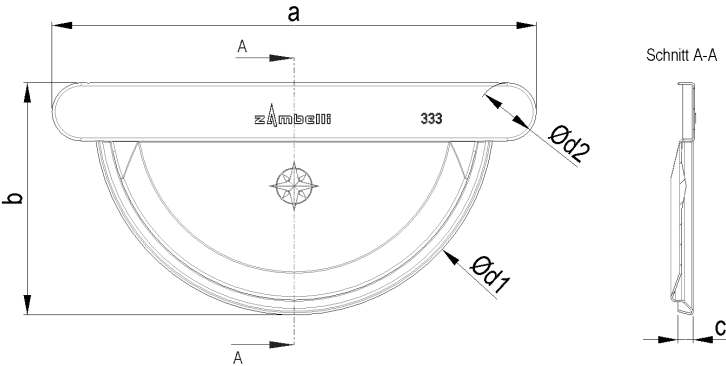


Stop end

Image	Product description	Technical details																																																								
 	<ul style="list-style-type: none"> ■ half round shape ■ useable on both sides for seaming ■ high-quality optical characteristic ■ consistent shape and exact fit accuracy ■ with compass card (Zambelli Logo) 	<p>Available Dimensions:</p> <p>400, 333, 280, 250, 200</p> <p>Materials:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Copper</td><td style="text-align: right;">0,55</td></tr> <tr><td>VM Blank-Zinc®</td><td style="text-align: right;">0,70</td></tr> <tr><td>VM Quartz-Zinc®</td><td style="text-align: right;">0,70</td></tr> <tr><td>VM Anthra-Zinc®</td><td style="text-align: right;">0,70</td></tr> <tr><td>Galvanized</td><td style="text-align: right;">0,65</td></tr> <tr><td>Uginox Patina K41®</td><td style="text-align: right;">0,50</td></tr> <tr><td>Aluminium</td><td style="text-align: right;">0,70</td></tr> </table> <p>Material standards</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr><td>Copper, Copper alloy</td><td>DIN EN 1172</td></tr> <tr><td>Zinc, Zinc alloy</td><td>DIN EN 988</td></tr> <tr><td>Aluminium</td><td>DIN EN 485-2+4/573</td></tr> </table> <p>Measurements:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <thead> <tr> <th>Size</th> <th>a</th> <th>b</th> <th>c</th> <th>Ød1</th> <th>Ød2</th> </tr> </thead> <tbody> <tr><td>400</td><td>240</td><td>114</td><td>6,0</td><td>192</td><td>22</td></tr> <tr><td>333</td><td>195</td><td>93</td><td>5,8</td><td>153</td><td>20</td></tr> <tr><td>280</td><td>167</td><td>79</td><td>5,5</td><td>127</td><td>18</td></tr> <tr><td>250</td><td>143</td><td>67</td><td>5,5</td><td>105</td><td>18</td></tr> <tr><td>200</td><td>113</td><td>53</td><td>4,5</td><td>80</td><td>16</td></tr> </tbody> </table>	Copper	0,55	VM Blank-Zinc®	0,70	VM Quartz-Zinc®	0,70	VM Anthra-Zinc®	0,70	Galvanized	0,65	Uginox Patina K41®	0,50	Aluminium	0,70	Copper, Copper alloy	DIN EN 1172	Zinc, Zinc alloy	DIN EN 988	Aluminium	DIN EN 485-2+4/573	Size	a	b	c	Ød1	Ød2	400	240	114	6,0	192	22	333	195	93	5,8	153	20	280	167	79	5,5	127	18	250	143	67	5,5	105	18	200	113	53	4,5	80	16
Copper	0,55																																																									
VM Blank-Zinc®	0,70																																																									
VM Quartz-Zinc®	0,70																																																									
VM Anthra-Zinc®	0,70																																																									
Galvanized	0,65																																																									
Uginox Patina K41®	0,50																																																									
Aluminium	0,70																																																									
Copper, Copper alloy	DIN EN 1172																																																									
Zinc, Zinc alloy	DIN EN 988																																																									
Aluminium	DIN EN 485-2+4/573																																																									
Size	a	b	c	Ød1	Ød2																																																					
400	240	114	6,0	192	22																																																					
333	195	93	5,8	153	20																																																					
280	167	79	5,5	127	18																																																					
250	143	67	5,5	105	18																																																					
200	113	53	4,5	80	16																																																					

Stop end

Article numbers:

Size	Copper	VM Blank-Zinc®	VM Quartz-Zinc®	VM Anthra-Zinc®	Galvanized	Uginox FTE®	Aluminium
400	116000	136000	186000	236000	126000	176000	156000
333	116005	136005	186005	236005	126005	176005	156005
280	116010	136010	186010	236010	126010	176010	156010
250	116015	136015	186015	236015	126015	176015	156015
200	116020	136020					156020

Packaging information:

Size	pc. /box
400	25
333	25
280	25
250	25
200	50

Text for invitation to tender:

Stop end useable on both sides for seaming, in accordance with gutter. Made by Zambelli or equal, delivery and professional installation.