
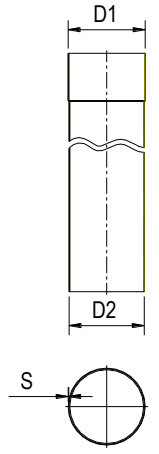


downpipe - robust

Image	Product description	Technical details																												
	<ul style="list-style-type: none"> ■ galvanized coated steel for maximum stability and permanent corrosion prevention ■ guaranteed uniform surface within the master system ■ structured and especially hard colour coating makes the pipe very scratch- and colourfast ■ best UV-resistance (RUV seamed pipe) ■ with internal seam ■ top end with socket ■ consistent shape and fit accuracy ■ high-quality optical characteristic 	<p>Available dimensions:</p> <p>120, 100, 80 Length: 2000 mm / 3000 mm</p> <p>Materials:</p> <table border="1" data-bbox="1456 630 2072 774"> <thead> <tr> <th></th> <th>80</th> <th>100</th> <th>120</th> </tr> </thead> <tbody> <tr> <td>galvanized</td> <td>0,60</td> <td>0,60</td> <td>0,60</td> </tr> <tr> <td>galvanized coated robust</td> <td>0,60</td> <td>0,60</td> <td>0,60</td> </tr> </tbody> </table> <p>Measurements:</p> <table border="1" data-bbox="1456 869 2038 997"> <thead> <tr> <th>size</th> <th>D1</th> <th>D2</th> <th>S</th> </tr> </thead> <tbody> <tr> <td>120</td> <td>120+1</td> <td>119</td> <td>0,60 - 0,70</td> </tr> <tr> <td>100</td> <td>100+1</td> <td>99</td> <td>0,50 - 0,65</td> </tr> <tr> <td>80</td> <td>80+1</td> <td>79</td> <td>0,50 - 0,65</td> </tr> </tbody> </table>		80	100	120	galvanized	0,60	0,60	0,60	galvanized coated robust	0,60	0,60	0,60	size	D1	D2	S	120	120+1	119	0,60 - 0,70	100	100+1	99	0,50 - 0,65	80	80+1	79	0,50 - 0,65
	80	100	120																											
galvanized	0,60	0,60	0,60																											
galvanized coated robust	0,60	0,60	0,60																											
size	D1	D2	S																											
120	120+1	119	0,60 - 0,70																											
100	100+1	99	0,50 - 0,65																											
80	80+1	79	0,50 - 0,65																											
<p>2D-Drawing</p>	<p>Material standards</p>																													
	<p>EN 10346</p>																													

downpipe - robust

Article number:

size	galvanized	galvanized coated robust
120	127912	147912
100	127910	147910
80	127980	147980

Tender specification:

Downpipes (orbital) according to DIN EN 612,
Material like gutter.
Mounting with brackets with screw top.
Size - 80 - 100 - 120 - mm,
Incl. required elbows, made of seamless butt-welded pipe, and pipe cover
Manufacturer Zambelli or equivalent
supply and install.....

0,000m