
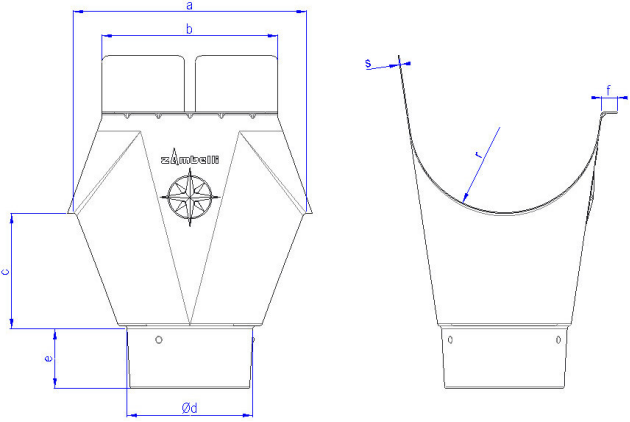


Outlet - Robust

Image	Product Description	Technical Details																																																									
	<ul style="list-style-type: none"> ■ galvanized coated steel for maximum stability and permanent corrosion prevention ■ guaranteed uniform surface within the master system ■ scratch resistant and colour proof due to a well-structured, hard and especially tough finish ■ high stability due to reinforced bend ■ with compass card ■ size 400/120 und 280/80 made of strip galvanized steel, copper wire welded and powdercoated, size 333/100 and 250/80 made of strip colour coated steel, seamed on backside ■ high-quality optics ■ consistent shape and exact fit 	<p>Sizes available: 400/120 333/100 280/80 250/80</p> <p>Material Thickness s:</p> <table border="1" style="width: 100%; border-collapse: collapse;"> <tr> <td style="border: 1px dashed black;">galvanized and coated Robust</td> <td style="border: 1px dashed black; text-align: center;">0,55 mm</td> </tr> </table> <p>Measurements:</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>size</th> <th>a</th> <th>b</th> <th>c</th> <th>e</th> <th>d</th> <th>r</th> <th>Ød</th> </tr> </thead> <tbody> <tr> <td>400/120</td> <td>216</td> <td>158</td> <td>100</td> <td>45</td> <td>13</td> <td>96</td> <td>120</td> </tr> <tr> <td>333/100</td> <td>180</td> <td>125</td> <td>85</td> <td>40</td> <td>14</td> <td>76,5</td> <td>100</td> </tr> <tr> <td>280/80</td> <td>168</td> <td>120</td> <td>90</td> <td>35</td> <td>13</td> <td>63,5</td> <td>80</td> </tr> <tr> <td>250/80</td> <td>155</td> <td>115</td> <td>82</td> <td>35</td> <td>10</td> <td>52,5</td> <td>80</td> </tr> </tbody> </table> <p>Order numbers / Packaging information:</p> <table border="1" style="width: 100%; border-collapse: collapse; text-align: center;"> <thead> <tr> <th>size</th> <th>galvanized coated Robust</th> <th>pc/box</th> </tr> </thead> <tbody> <tr> <td>400/120</td> <td>140005</td> <td>5</td> </tr> <tr> <td>333/100</td> <td>140015</td> <td>25</td> </tr> <tr> <td>280/80</td> <td>140050</td> <td>5</td> </tr> <tr> <td>250/80</td> <td>140055</td> <td>5</td> </tr> </tbody> </table> <p>Text for invitation to tender:</p> <p>Outlet, with reinforced bend, welded on the backside or seamed, with compass card, as addition to gutter, Zambelli brand or equal, size xxx: delivery and installation.</p>	galvanized and coated Robust	0,55 mm	size	a	b	c	e	d	r	Ød	400/120	216	158	100	45	13	96	120	333/100	180	125	85	40	14	76,5	100	280/80	168	120	90	35	13	63,5	80	250/80	155	115	82	35	10	52,5	80	size	galvanized coated Robust	pc/box	400/120	140005	5	333/100	140015	25	280/80	140050	5	250/80	140055	5
galvanized and coated Robust		0,55 mm																																																									
size	a	b	c	e	d	r	Ød																																																				
400/120	216	158	100	45	13	96	120																																																				
333/100	180	125	85	40	14	76,5	100																																																				
280/80	168	120	90	35	13	63,5	80																																																				
250/80	155	115	82	35	10	52,5	80																																																				
size	galvanized coated Robust	pc/box																																																									
400/120	140005	5																																																									
333/100	140015	25																																																									
280/80	140050	5																																																									
250/80	140055	5																																																									
2D-Design																																																											
	Material Standards																																																										
	EN 10346																																																										