


fixed point with
aluminium rivet

RIB-ROOF Speed 500

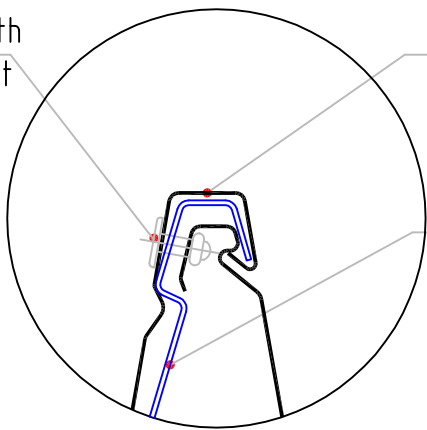

Detail fixed point
scale 1:2

clip border (perforated)
directional clip (optional turned version for curved profiled sheets) or
directional point profile (optional turned version for curved profiled sheets)

build up:

- RIB-ROOF Speed 500
- protective layer (optional)
- rigid insulation board
- vapour barrier

rooflight
on site
suspended plate
rooflight cover plate of ridge

profile filler - top side
closure
fix point (acc. statocs requirement)
clip border (perforated)
omega profile for fixed point
acc. statics requirement
with thermal insulation strip

mind. 150


clean width

insulation
vapour barrier
connecting to rule
vapor tight
RIB-ROOF-folded up at
ridge side
rooflight frame
(connection of flashing
vapour tight bonded)

carrying tray

UE support

rooflight at the ridge

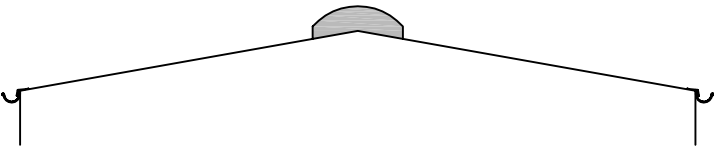

title
rooflight junction of ridge
with clip border (perforated)

System
RIB-ROOF Speed 500

drawn by A.K.	scale 1:5
drawing nr. D.1.6.04	index date 23.01.14
format A3	

RIB-ROOF
metalldachsysteme

Zambelli RIB-ROOF GmbH & Co. KG
Hans-Sachs-Str. 3+5, D-94569 Stephansposching
Tel. +49 (0)9931 89590-0
Fax +49 (0)9931 89590-49
e-mail: rib-roof@zambelli.de



This drawing is copyright and remains the property of Zambelli. It must not be reproduced, used, disclosed or transmitted to third parties in any form, in whole or in part, without prior written permission.