


fixed point with
aluminium rivet

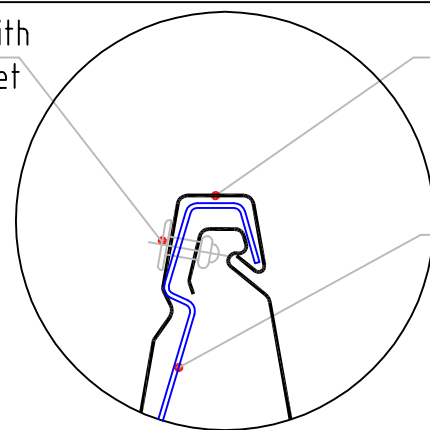

Detail fixed point
scale 1:2

RIB-ROOF Speed 500

clip border (perforated)

directional clip (optional turned version for curved profiled sheets) or
directional point profile (optional turned version for curved profiled sheets)

rooflight

on site

suspended plate

rooflight cover plate of eave

RIB-ROOF-folded up at
ridge side

profile filler - top side

closure

omega profile for fixed point
acc. statics requirement
with thermal insulation strip

fix point
(acc. statics requirement)

clip border (perforated)

build up:

RIB-ROOF Speed 500

protective
layer (optional)

rigid insulation
board

vapour barrier

mind. 150

clean length

insulation

vapour barrier
connecting to rule
vapor tight

rooflight frame
(connection of flashing
vapour tight bonded)

carrying tray

UE support

rooflight in the roof area

title
rooflight junction of eave
in roof area with clip border (perforated)

System
RIB-ROOF Speed 500

drawn by	scale
A.K.	1:5
drawing nr.	index
D.1.6.06	date
	23.01.14
	format
	A3

RIB-ROOF
metaldachsysteme

Zambelli RIB-ROOF GmbH & Co. KG
Hans-Sachs-Str. 3+5, D-94569 Stephansposching
Tel. +49 (0)9931 89590-0
Fax +49 (0)9931 89590-49
e-mail: rib-roof@zambelli.de

zambelli

This drawing is copyright and remains the property of Zambelli. It must not be reproduced, used, disclosed or transmitted to third parties in any form, in whole or in part, without prior written permission.