


comment: To fasten the new Clip Speed 500 , with hole diameter 6,50mm, you can now also use the hexagonal screws, pan head screws and round head screws!

The existing countersunk we no longer recommend!

Dimensions for the fastening screw:
screw head diameter max. 14,00mm,
screw head height max. 5,50mm!

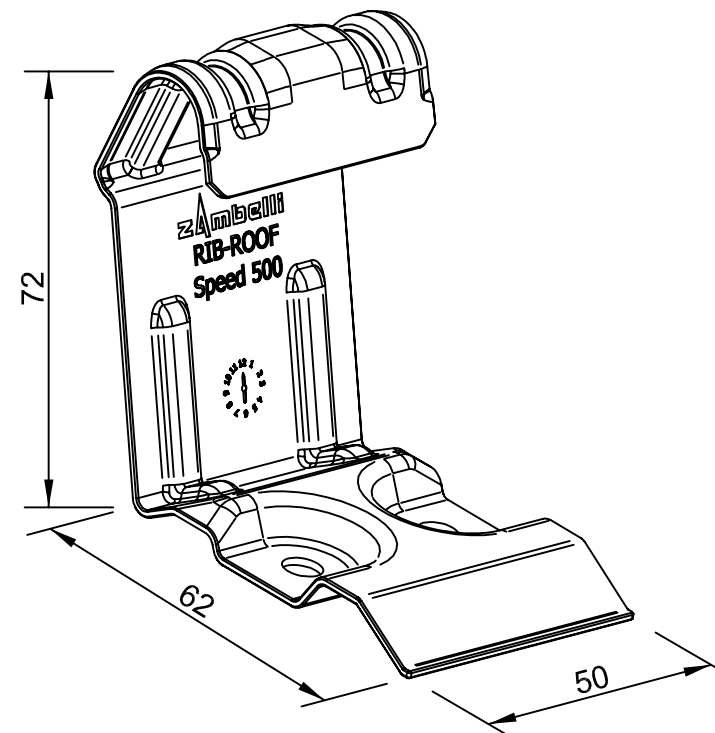

title		system			
RIB-ROOF Speed 500		RIB-ROOF Speed 500			
standard clip		system accessories	drawn by	scale	
			T.W.	1:2	
		drawing nr.	index	date	format
		Z.1.1.1	A	02.12.09	A4
RIB-ROOF metaldachsysteme		Zambelli RIB-ROOF GmbH & Co. KG Hans-Sachs-Str. 3+5, D-94569 Stephansposching Tel. +49 (0)9931 89590-0 Fax +49 (0)9931 89590-49 e-mail: rib-roof@zambelli.de			This drawing is copyright and remains the property of Zambelli. It must not be reproduced, used, disclosed or transmitted to third parties in any form, in whole or in part, without prior written permission.
		