


More than 4 ° DN the hold corners of the step holders cannot be used any more (see drawing Z.2.9.04). Then here a conical hold corner is to be used.

Assembly of the step holders not directly about hold clip, distance mind. 100 mm because of expansion profile road RIB-ROOF.

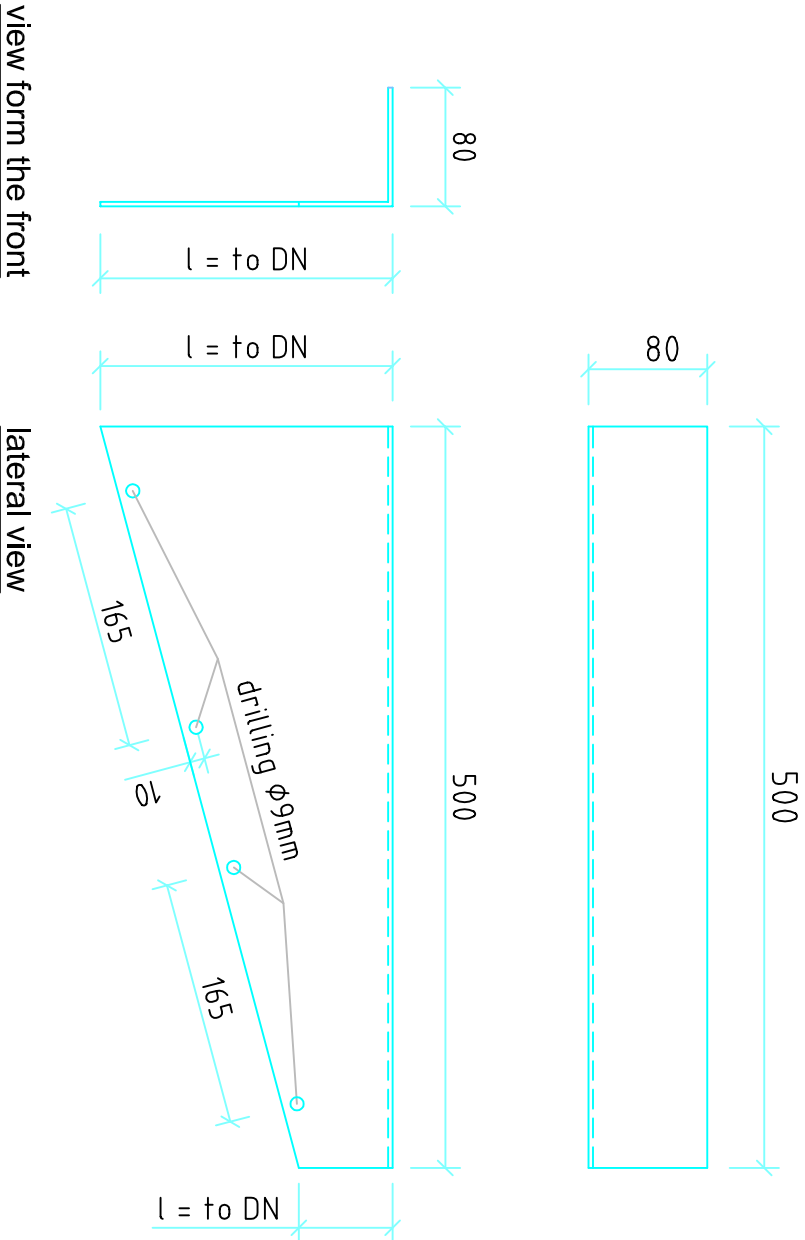

conical angle brackte for step holders
about 4° inclination
mat.: Alu walzblank,
material-strength by static requirement

M 1:5

System		RIB-ROOF Speed 500	
Zeichnungsinhalt		Zeichnung Nr.	Gez. l.K. Maßstab
deatili duckboard (b=500mm) of 4° until max. 30° DN with conical angle bracket		system accessories	1:5
max. 30° DN with conical angle bracket		Index	Format
		A	A3
Zambelli RIB-ROOF GmbH & Co. KG Hans-Sachs-Str. 3+5, D-94569 Stephansposching Tel. +49 (0)9931 89590-0 Fax +49 (0)9931 89590-49 e-mail: rib-roof@zambelli.de		Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhaltes ist nicht gestattet, soweit nicht schriftlich zugestanden. Alle Rechte, auch für Patenterteilung und GW-Erstellung vorbehalten.	