
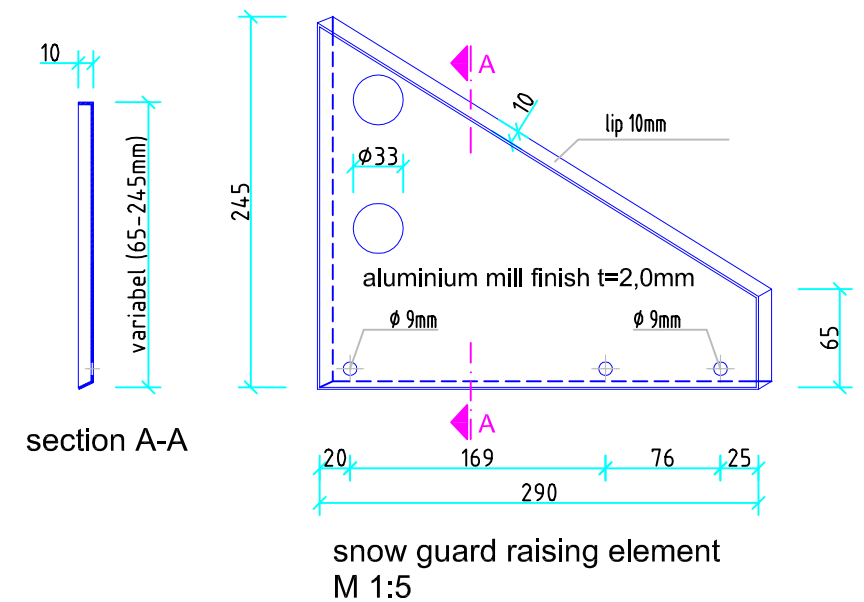


**Hint:** A distance of at least 0.50m has to be observed to the PV modules!

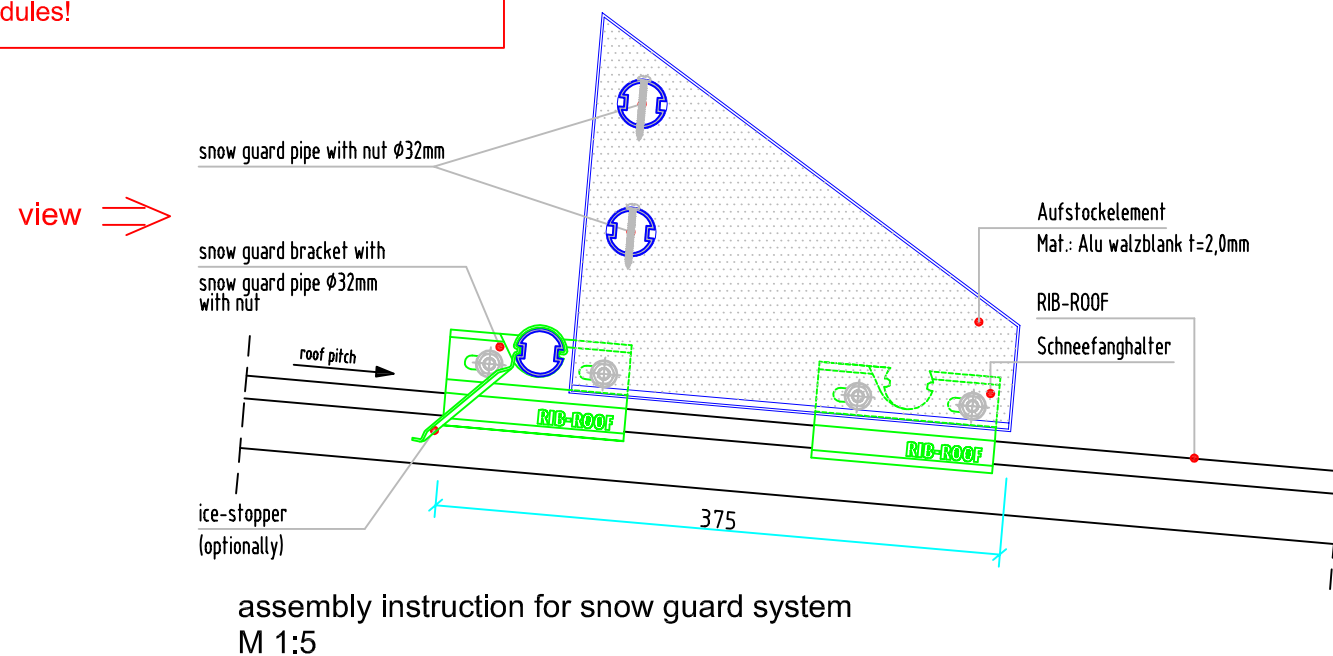

- Hint:**
- A finished snow guard raising element holds three snow guard pipes and needs two snow guard brackets. When refitting an old building please order it dependently. The distances of the snow guard row according to our 'manual for planning and Installation' can be increased by 50%.
  - Snow guard brackets mustn't be installed directly in the area of the fixing element so that a length expansion of the profiled sheet's is guaranteed.
  - Tightening torque for screws 20 Nm.

title  
raising element for snow guard system  
(execution: snow guard bracket with "nose")

**RIB-ROOF**  
metaldachsysteme

Zambelli RIB-ROOF GmbH & Co. KG  
Hans-Sachs-Str. 3+5, D-94569 Stephansposching  
Tel. +49 (0)9931 89590-0  
Fax +49 (0)9931 89590-49  
e-mail: rib-roof@zambelli.de

System  
**RIB-ROOF 465**

**system accessories**

drawing nr.  
**Z.2.6.04-N**

index  
**A**

drawn by I.K.	scale 1:5
date 04.11.14	format A3

**zambelli**

This drawing is copyright and remains the property of Zambelli. It must not be reproduced, used, disclosed or transmitted to third parties in any form, in whole or in part, without prior written permission.