


Sequence of assembly:

The first step is to swing side ① below the edge of the seam then second step is to swing side ② below the seam.

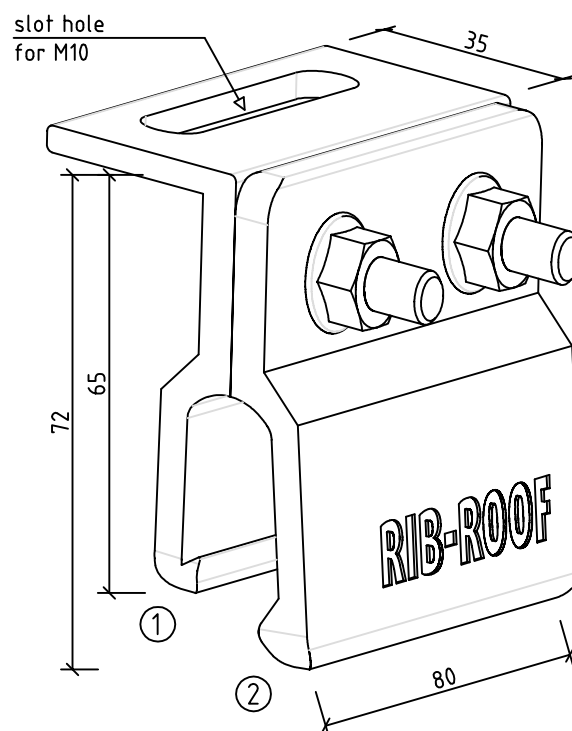

Solar support
for RIB-ROOF Speed 500

- Note:
- Each solar support RIB-ROOF can be stated with the allowable $F=0,5$ kN to the load of the wind uplift. Do not install solar support near by the clips to ensure the elongation of the sheets. Bolting torque of the screw 20Nm.
 - Suitable only for RIB-ROOF Speed 500 metal roofs from delivery in 2005. Older roofs on request.

title		system	
installation instruction solar support		RIB ROOF Speed 500	
		system accessories	drawn by T.W.
		drawings nr. Z.1.7.01	scale 1:no scale
		index H	date 10.10.12
			format A4
RIB-ROOF metalldachsysteme		Zambelli RIB-ROOF GmbH & Co. KG Hans-Sachs-Str. 3+5, D-94569 Stephansposching Tel. +49 (0)9931 89590-0 Fax +49 (0)9931 89590-49 e-mail: rib-roof@zambelli.de	
		zambelli	
		Weitergabe sowie Vervielfältigung dieser Unterlage, Verwertung und Mitteilung ihres Inhaltes ist nicht gestattet soweit nicht schriftlich zugestanden. Verstoß verpflichtet zu Schadenersatz. Alle Rechte, auch für Patenterteilung und GM-Erteilung vorbehalten.	